

## THE EFFECT OF BILGE GEOMETRIES ON RESISTANCE IN DISPLACEMENT BOATS AND IMPORTANCE FOR THE SHIP INDUSTRY

*S. Aydın Şalci,*

Prof. Dr.

E-mail: salcia@itu.edu.tr

*Munir Suner,*

Lecturer, PhD Canditate

Istanbul Technical University, Maritime Faculty

E-mail: msuner@itu.edu.tr

**Abstract.** It is a fact that a bilge, which connects the board with bottom is an important part of ship geometry in ship building. The shape of bilge, which is supported by Marcin bracket inside and carries the bilge keel outside, has a considerable effect on the formation of bilge vortices, rolling motion, transverse geometric stability, mid-ship section coefficient and the ship resistance.

In this study the resistance and power alteration in alternative bilge geometries have been investigated by taking a ship form without deadrise as the main figure. The alteration of resistance and power have been studied by using the Ship Model Experiment Technics. Rectangle, double-chain and round forms were used as alternative bilge geometries.

Model experiments done in three different loading conditions, empty, loaded and excessively loaded. The results were transferred into the values of a ship by applying the simialrity laws.

The effects of the bilge geometry are presented at the end of the study. Furthermore the effects of the results in ship building sector are disscussed as a conclusion.

### 1. INTRODUCTION

It is a fact that bilge, which connects the boards with bottom is an important part of ship geometry. The shape of bilge, which is supported by Marcin bracket inside and carries the bilge kneel outside, has a considerabl effect on the formation of bilge vortices, rolling motion, transverse geometric stability, mid-ship section coefficient and the ship resistance.

In this study, the resistance and power alteration in alternative bilge geometries have been investigated by taking a ship form whitout deadrise as the main figure. The alteration of resistance and power have been studied by using the Ship Model Experiement Technics. Rectangle, double-chin and round forms werw used as alternative bilge geometries. A wooden ship model whose lenght of load waterline was  $L^{***} = 1,640$  meters and wose similarity ratio was  $\alpha = 50$  was used in experiment.

Model experiments were done in three different loading conditions- empty, loaded and excessively loaded. There was no appendage on the model and the experiment was done without a trim. In order to observe the effect of bilge geometry better, the parallel body of ship was chosen comparatively large. According to the results of the experiment, double-chin form produced the minimum resistance after a certain value of velocity, 1 m/s.

As can be expected, the form which produced the maximum resistance was the rectangular form. The experiments were done in Ship Model Basin of Istanbul Technical University(I.T.U). The model ship was towed on smooth water conditions; the velocities were measured by a tachometer generator and the resistance was measured by Atwood dynamometer. The results of the experiments were transferred into those values of the ship by applying the similarity laws.

The calculations for resistance were realised in two different ways- one by Froude hypothesis and the other by Hughes hypothesis (Form Factor Method).

In the calculations done by Hughes hypothesis, the extrapolator diagram was modified by means of a mathematical transformation and the form factor was obtained. So by using a single model instead of an extrapolator curve which needs more than one model, it was possible to obtain a form factor (but by the help of a transformed extrapolator). The changes (alternations) in resistance and power as a function of draught were studied for three different bilge geometries as well.

In order to provide flow similarity (Reynolds similarity) turbulence generator was placed at the bow of model. The diameter of the circular-section of trip wire which was used as the turbulence generator was determined by taking a boundary-layer thickness into consideration. In calculation the friction resistance, ITTC-1957 formula was used.

## 2. ANALYTICAL MODELLING

Total hydrodynamic resistance force in displacement boats is formed under the influence of a number of parameters.

$$R_t = f(V, L, Fr, Re, LCB, \frac{L}{B}, \frac{B}{T}, \alpha_E \dots). \quad (1)$$

In order to determine the effect (influence) of each of these parameters on resistance, model series which are very common and can be taken as reference are chosen and systematical ship-model experiments are done. These experiments can be realized at the towing tank or at the circulating channel. In this study systematical experiments were done with a ship model whose parallel body length was rather long (Landing Craft) and these experiments were conducted at different loading conditions and with different bilge geometries. As a result, alterations in resistance were obtained. By applying the laws of similarity the data of the experiment was transformed into the values of the ship (prototype).

The analysis of total hydrodynamic resistance can be made in two different ways.

a) Froude Hypothesis:

$$R_t = R_f + R_r; \quad (2)$$

b) Hughes Hypothesis:

$$R_t = R_v + R_w. \quad (3)$$

In these equations,

$R_t$  = total resistance

$R_f$  = frictional resistance

$R_r$  = residuary resistance

$R_v$  = viscous resistance

$R_w$  = wave resistance

### 2.1. Froude Hypothesis

$$R_t(Re, Fr) = R_f(Re) + R_r(Fr) \quad [Kafali,1], [Kafali,2], [Comstock,3] \quad (4)$$

$$R_f = C_f \cdot \frac{\rho}{2} \cdot v^2 \quad (5)$$

$$C_f = 0,0075 / (\log Re - 2)^2 \quad [ITTC-1957].$$

If  $Fr_m = Fr_p$ , then  $(R_r / \Delta)_m = (R_r / \Delta)_p$  and when we write  $\gamma = \rho \cdot g$  and

$$\frac{R_{rp}}{R_{rm}} = \Delta_p / \Delta_m = \gamma_p \cdot \nabla_p / \nabla_m, \quad (6)$$

then

$$\frac{R_{rp}}{R_{rm}} = \Delta_p / \Delta_m = \rho_p / \rho_m \cdot \alpha^3 \quad (7)$$

is obtained.

According to hypothesis:

when  $R_{tm} = R_{fm} + R_{rm}$  is written for the model and  $R_{tp} = R_{fp} + k \cdot R_{rp}$  is written for the prototype (here  $k$  is a correlation factor which is constant,  $k = 1,15$ ) then,

$$R_{fp} = C_{fp} \cdot \rho_p / 2 \cdot S_p \cdot v_p^2, \quad (8)$$

$$R_{rp} = \rho_p / \rho_m \cdot \alpha^3 \cdot R_r, \quad (9)$$

$$R_{tp} = C_{fp} \cdot \rho_p / 2 \cdot S_p \cdot v_p^2 + 1,15 \cdot \rho_p / \rho_m \cdot \alpha^3 \cdot R_{rm} \quad (10)$$

is obtained.

In this equation,  $S_p = \alpha^2 \cdot S_m$  and for the  $Fr_{mp} = constant$

$$(V / \sqrt{L})_m = (V / \sqrt{L})_p \rightarrow (V_p / V_m) = (\sqrt{L_p} / \sqrt{L_m}) = \sqrt{\alpha}; \quad (11)$$

$$V_p = \sqrt{\alpha} \cdot V_m. \quad (12)$$

On the other hand,

$$R_{rm} = R_{tm} - R_{fm} = R_{tm} - C_{fm} \cdot \rho_m / 2 \cdot S_m \cdot v_m^2; \quad (13)$$

$$(C_f)_{m,p} = 0,0075 / [\log(Re)_{m,p} - 2]^2 \quad [\text{ITTC-1957}]. \quad (14)$$

In this equation

$Re$ : Reynolds number,  $Re = v \cdot \frac{L}{\mathcal{G}}$ ;

$Fr$ : Froude number,  $Fr = \frac{V}{\sqrt{L}}$ ;

$C_f$ : Coefficient of frictional resistance;

$\rho$ : Specific density of fluid;

$S$ : Wetted surface area;

$V$ : Forward velocity of body (knot), (1 knot  $\approx$  0,5144 m/s);

$v$ : Forward velocity of body (m/s);

$\mathcal{G}$ : Kinematic viscosity of fluid;

$g$ : Gravitational acceleration,  $g = 9,81 \text{ m/s}^2$ ;

$L$ : Body length (ship or its model);

$\Delta$ : displacement.

## 2.2. Hughes Hypothesis

In this hypothesis, the total hydrodynamic resistance is divided into resistance components as,

$$R_t(Re, Fr) = R_v(Re) + R_w(Fr), \quad [1], [2], [3].$$

According the hypothesis, form factor is defined as

$$K = \frac{R_{vp}}{R_{fp}} - 1 = \frac{C_{vp}}{C_{fp}} - 1. \quad (15)$$

Form factor gives the transformation (passage) between two or three dimensional surfaces. Extrapolator diagram is needed to find  $K$ .

Therefore, by writing

$$R_{vp} = R_{fp} (K + 1); \quad (16)$$

$$R_{ip} = R_{vp} + R_{fp} \quad (17)$$

and by taking Froude Similarity,

$$Fr_m = Fr_p \rightarrow C_{wp} = C_{wm}; \quad (18)$$

$$C_w = R_w / \rho / 2 \cdot S \cdot v^2; \quad (19)$$

$$R_{ip} = [C_{im} + (1 + K)(C_{fg} - C_{fm})] \cdot \rho_p / 2 \cdot S_p \cdot v_p^2 \quad (20)$$

are obtained. In this equation;

$K$  = Form factor;

$C_v$  = Coefficient of viscosity resistance;

$C_t$  = Coefficient of wave resistance.

In order to calculate the form factor, point  $C_w = 0$  is to be determined in  $C_t = f(Re)$  diagram. At this point, viscosity resistance curve is the envelope of total resistance curve. If  $Re = Re^*$  at this point, then

$$Re = Re^*; C_{wm} \rightarrow 0 : C_{tm} = C_{wm} = (1 + K)C_{fm} \quad (21)$$

and the variable transformation

$$\text{Log } Re - 2 = x \text{ and } x^2 = X. \quad (22)$$

When  $C_t = f(X)$  modified extrapolator diagram is drawn, then  $C_f$ : ITTC -1957 curve and also  $C_v$  viscosity resistance curve are turned out to be straight lines passing through the origin. In this diagram  $C_v$  curve is straight line which is tangent to  $C_t$  total resistance curve and which passes through the origin, the touching point is  $Re = Re^*$ .

In this diagram,  $\left( \frac{\partial C_t}{\partial X} \right) \Big|_{x=0} = \tan \Theta = 0.075 = \text{constant} \rightarrow \Theta = 4.289^\circ$  is obtained.

### 3. EXPERIMENTAL MODELLING

#### 3.1. Experimental Data

The model used in the experiment was wooden and painted, with no appendages and bulb and had an  $\alpha = 50$  similarity ratio and was in parallel floating condition (no trim). A turbulence generator trip wire with a 1.5 mm diameter was placed at the bow of the model to provide Reynolds flow similarity.

The ship model was towed in three different loading conditions coded as WL 3, WL 4 and WL 5.

With the application of similarity law, transfer from the model to the prototype was made by taking the standard conditions for sea water and dimensions of model ship as

$$t_p = 15\text{ C}^\circ \rightarrow \rho_p = 104,61\text{ kg}\cdot\text{s}^2\cdot\text{m}^{-4}, \quad v_p = 0,1191\cdot 10^{-5}\text{ m}^2\cdot\text{s}^{-1}$$

$$L_m = 1,620, \quad \Delta_m = 16,564\text{ kg}, \quad S_m = 0,524\text{ m}^2, \quad \rho_m = 101,84\text{ kg}\cdot\text{s}^2, \quad V_m = 0,11\cdot 10^{-5}\text{ m}^2\cdot\text{s}^{-1}$$

The results of experiment are as follows for rectangular, double-chin and round geometry in Table 1, 2 and 3.

Table 1

**Ship with rectangular bilge geometry**

Vm (m/s)	WL 3 (kg)	WL 4 (kg)	WL5 (kg)
0.40	0.038	0.040	0.048
0.50	0.050	0.055	0.065
0.60	0.068	0.076	0.088
0.70	0.085	0.099	0.120
0.80	0.115	0.130	0.165
0.90	0.155	0.175	0.227
1.00	0.215	0.250	0.325
1.10	0.287	0.350	0.437
1.20	0.375	0.480	0.574
1.30	-	0.695	0.815

Table 2

**Ship with double chin bilge geometry**

Vm (m/s)	WL 3 (kg)	WL 4 (kg)	WL5 (kg)
0.40	0.040	0.045	0.050
0.50	0.052	0.056	0.065
0.60	0.068	0.075	0.087
0.70	0.088	0.097	0.116
0.80	0.115	0.130	0.156
0.90	0.150	0.188	0.210
1.00	0.210	0.255	0.305
1.10	0.305	0.368	0.468
1.20	0.416	0.495	0.588
1.30	0.515	0.643	0.700

Table 3

**Ship with round bilge geometry**

Vm (m/s)	WL 3 (kg)	WL 4 (kg)	WL5 (kg)
0.40	0.035	0.043	0.051
0.50	0.050	0.058	0.051
0.60	0.068	0.078	0.095
0.70	0.090	0.110	0.125
0.80	0.120	0.143	0.163
0.90	0.155	0.194	0.228
1.00	0.215	0.277	0.320
1.10	0.305	0.380	0.476
1.20	0.407	0.498	0.585
1.30	0.590	-	-

The experimental data was obtained in smooth water surface (no waves) conditions. For the towing experiments following one another, enough time was given to make the water surface smooth again.

### 3.2. Results

The results of the experiment can be evaluated in several different ways by using the methods mentioned in analytical modelling and by using the laws of similarity.

Model resistance characteristics for each bilge geometry – Fig. 1, double hull resistance coefficient curve for WL4 – Fig. 2, form factor change according to draft for each bilge geometry – Fig. 3, prototype resistance characteristic – Fig. 4 and power- draft linkages – Fig. 5 are presented.

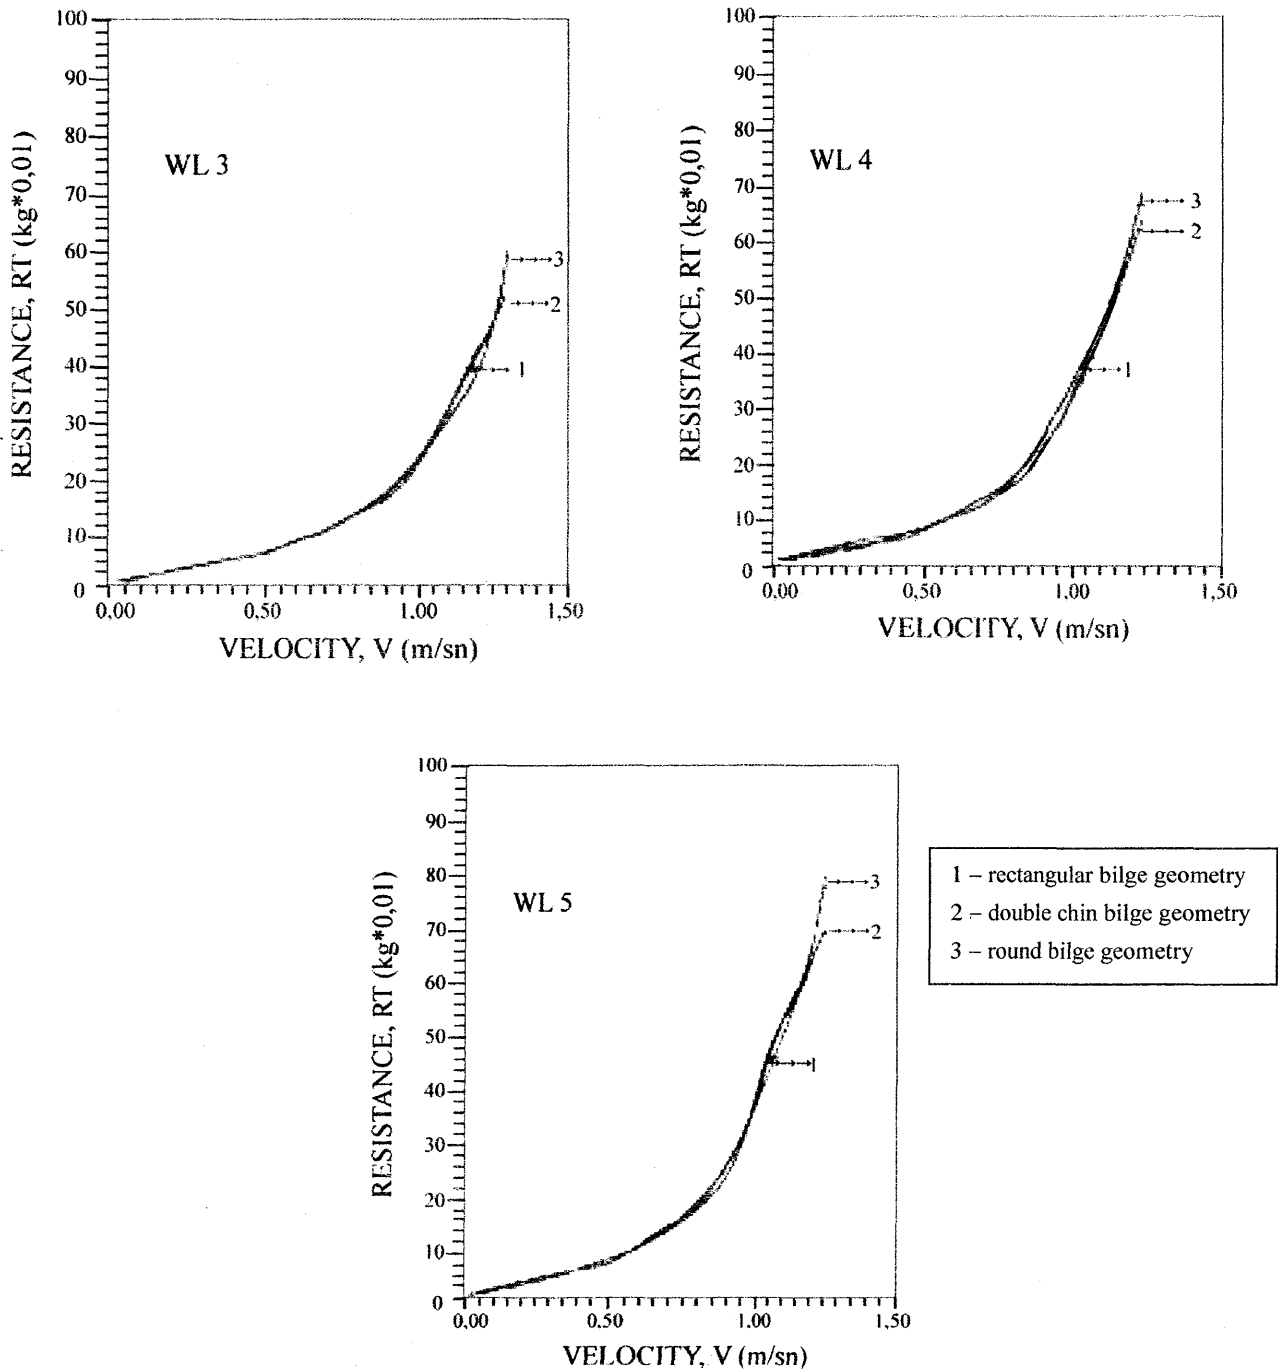


Fig. 1. Model Resistance Characteristics for each bilge geometry

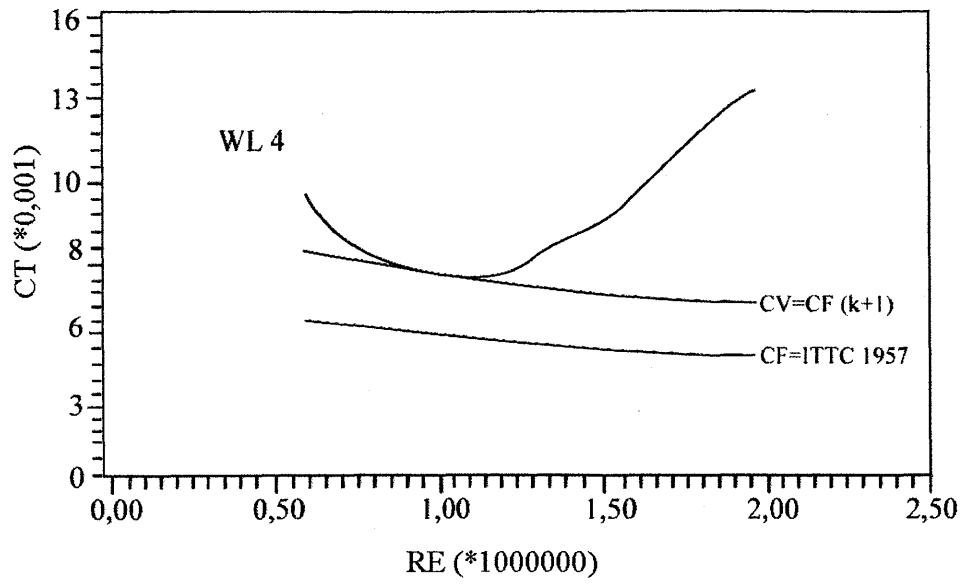


Fig. 2. Double chin bilge resistance coefficient curve for WL4

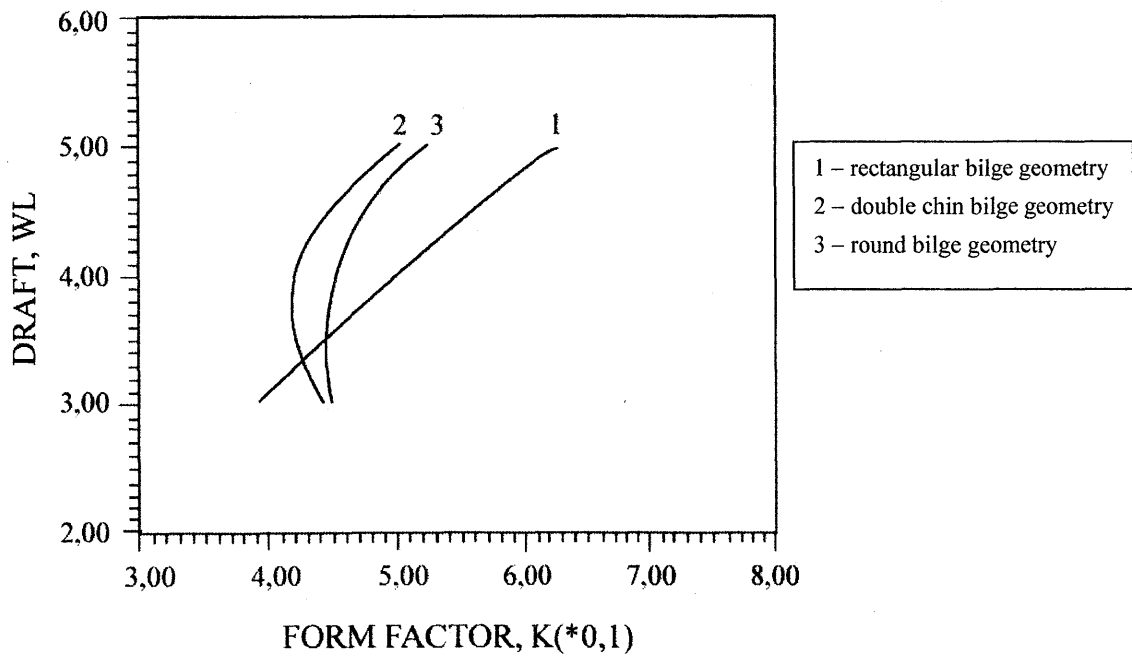


Fig. 3. Form Factor change according to draft for each bilge geometry

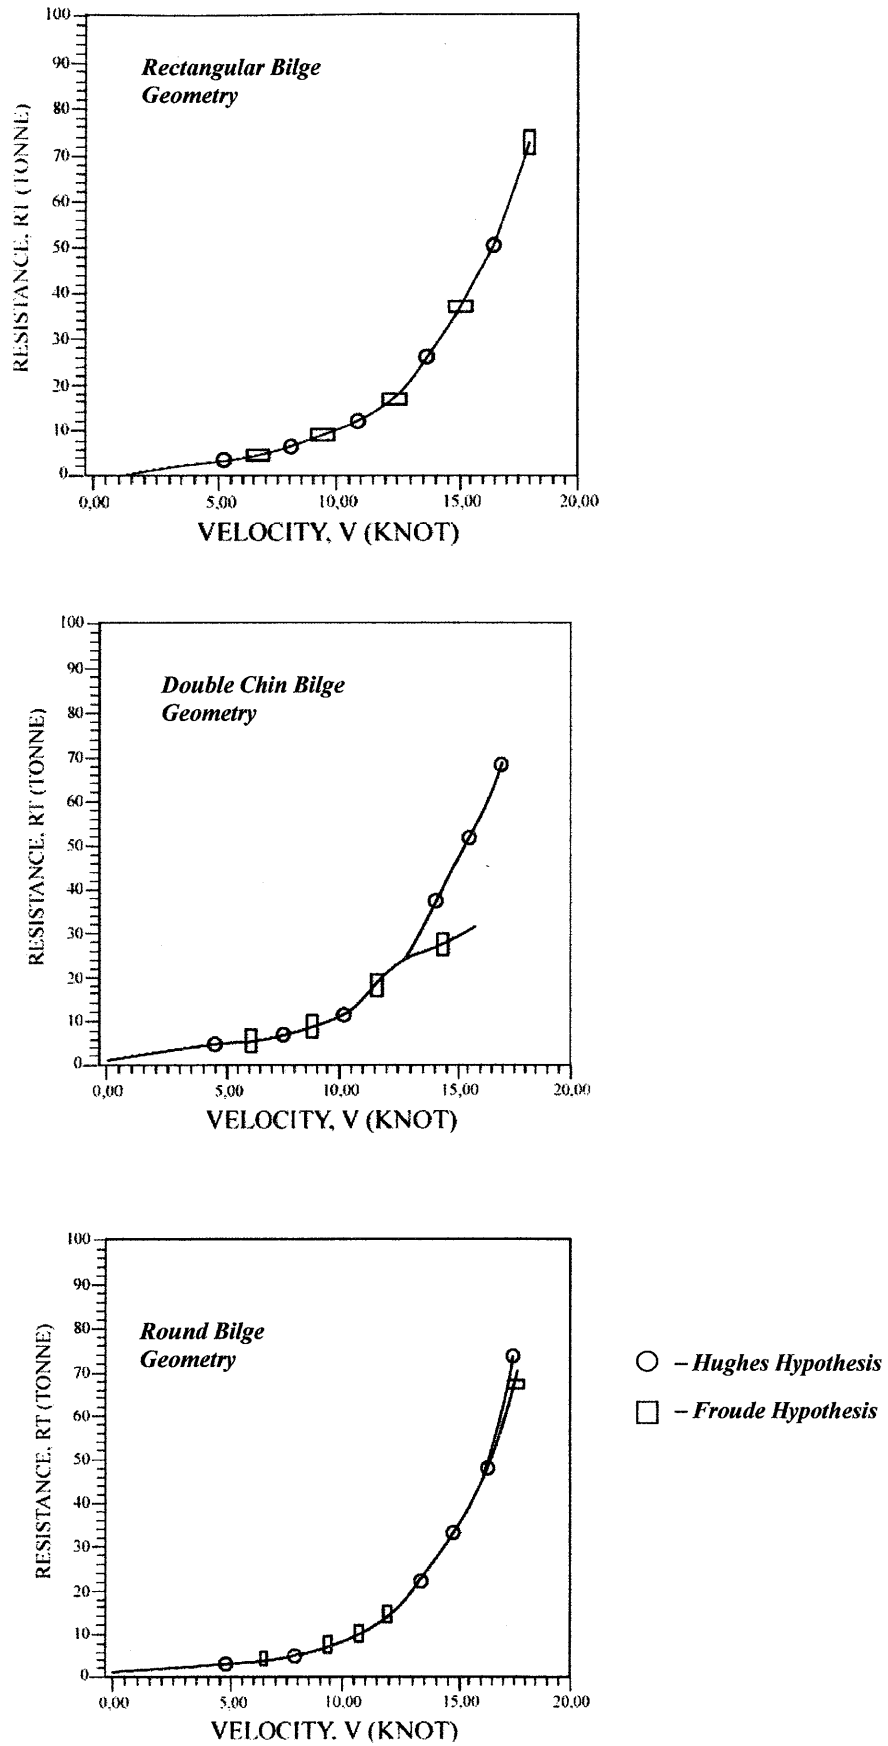


Fig. 4. Prototype resistance of WL4 for each bilge geometry, rectangular, double chin and round respectively



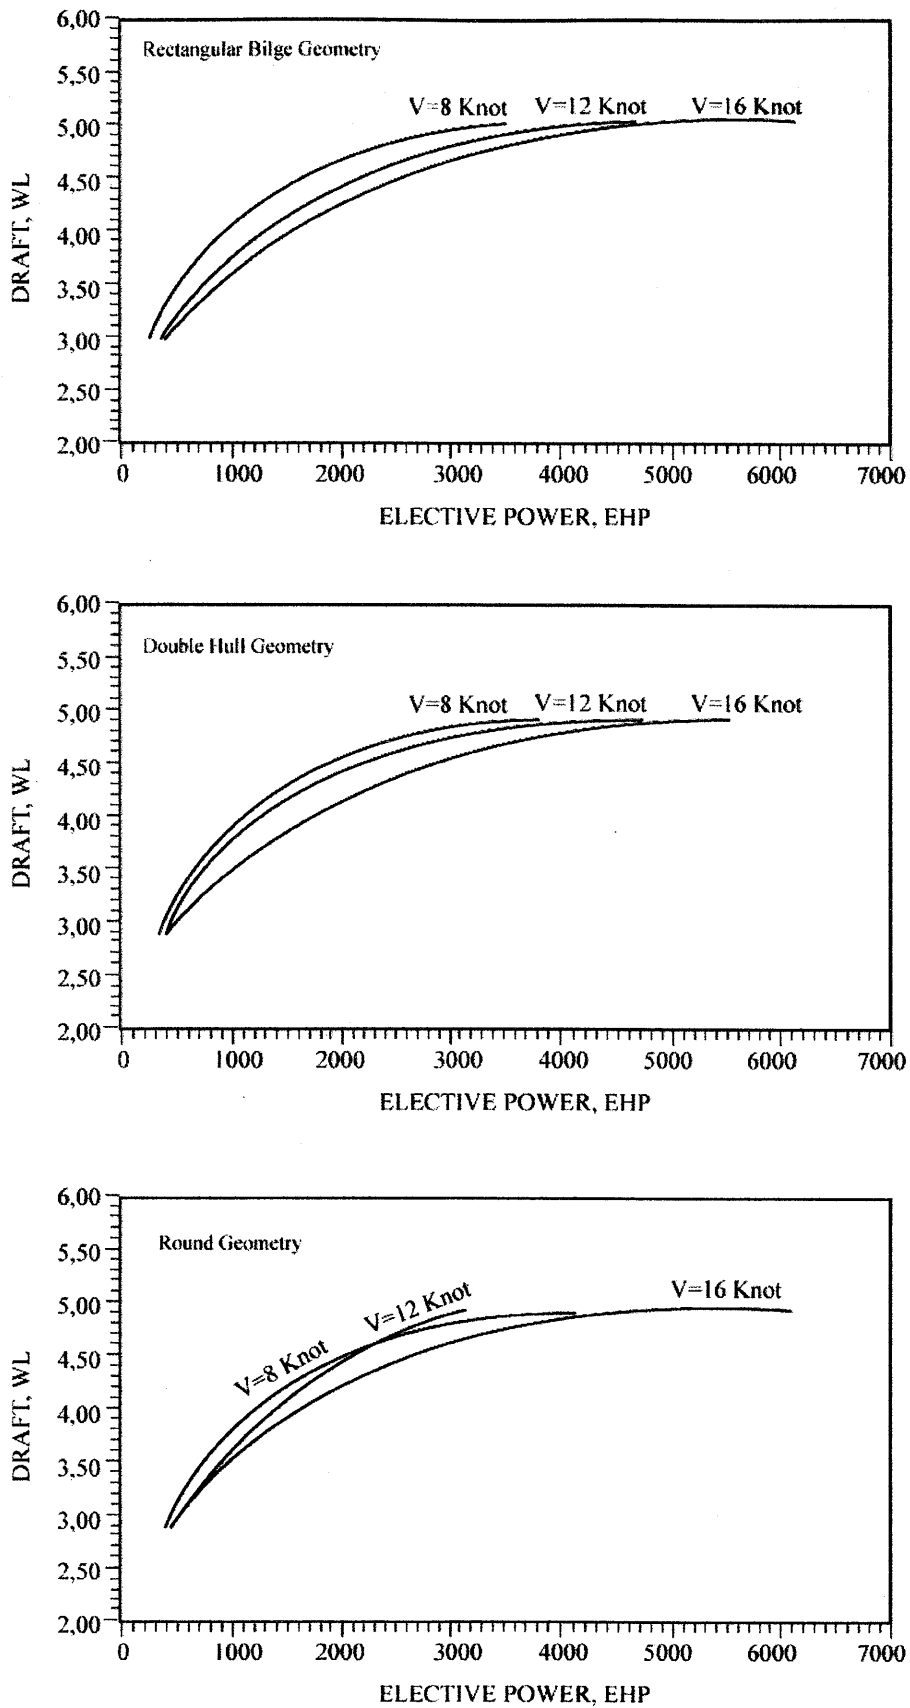


Fig. 5. Draft-Power Characteristics for each bilge geometry

#### **4. CONCLUSION**

In literature various ways are introduced to reduce the resistance in ships. In this study the bilge geometry which is one of the key element for the cross section geometry of ship is investigated to understand its effects on ship resistance. The results are presented. It is seen that bilge geometry is directly effect the resistance of the ship. In this context bilge geometry is also directly effect the ship operations by reducing the operational costs.

#### **ACKNOWLEDGEMENT**

We would like to a special thank to Ms. Pelin Yilmaz who is Phd Candidate in Shanghai Maritime University and research assistant in Istanbul Technical University Maritime Faculty, for her endeavours in this study.

#### **References**

- [1] Kafalı, K., Static and Dynamic Principles of Ship Forms. Vol.2 (Ship Resistance and Propulsion) Istanbul, 1975.
- [2] Kafalı, K.The Design of Ships, Istanbul, 1988.
- [3] M. Comstock, Principles of Naval Architecture, SNAME, New York, 1974.